



Sloted Drain Inlet

Specification Sheet



GEOTUO

geotuo.com | hello@geotuo.com

Applications

typical curb-and-gutter applications such as on-grade opening,sag inlet and sheet flow intercept to remove the surface water in the project plan

The standards to meet for corrugated steel pipes:

ASTM A760/A760M-15 (AASHTO M36)



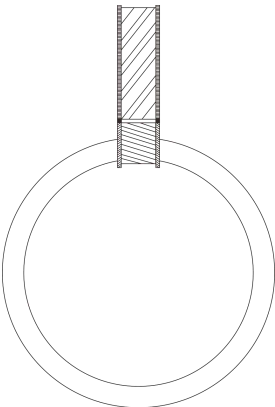
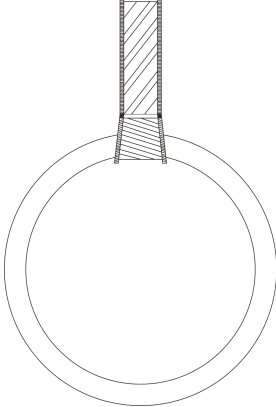
standard specification for corrugated steel pipe metallic-coated for sewers and drains

ASTM A762/A762M-15 (AASHTO M245)

standard specification for corrugated steel pipe polymer precoated for sewers and drains

Types

according to the grates,side plates and spacers

Items	straight grate	trapezoidal grate
standard height		
variable height + extender		

Materials and Coatings

zinc(galvanizing) coated steel sheet & coils with 2 oz/ft2 zinc coating

Items	in.	mm	Gage	
diameter	12	300	Pipe	band
	15	375	12	
	18	450	14	18
	21	525	16	
	24	600		
	30	750		
	36	900		
grate height	2 1/2	64		
	6	150		
spacer /side plate thickness	3/16	4.7625		
opening /slot width	1 3/4	44.45		

Pipe length 20ft (6m) each or as request

